

---

# TIGERFLOW OCELOT BOOSTER

---

[www.tigerflow.com](http://www.tigerflow.com)

---



## • APPLICATIONS



Schools



Hotels



Apartment  
Buildings



Agricultural  
Irrigation



Residential  
Homes



**TIGERFLOW®**




# OCELOT BOOSTER

## • STANDARD FEATURES

- Permanent magnet motor with integrated VFD
- Adjustable pressure setpoint through easy-to-use interface
- Standard self-priming of 9ft, up to 25ft based on installation conditions
- AISI 304 SS pump body
- Built-in expansion tank for leak loads
- Excellent for residential or light commercial applications
- Light weight and easy to move
- Built-in check valves on suction and discharge
- TEFC Motor
- IPX-6 Cover, Outdoor Rated. Pump protected against high pressure water stream from any angle.
- UL Listed, NSF-61 / NSF-372

## • PERFORMANCE TABLE

Model	Power	Max. Flow	Max. Head	Rated Flow	Rated Head	Port Size	Lift. Max
Ocelot 25	1 HP	24 GPM	164 FT	13 GPM	92 FT	1"	9 FT
Ocelot 60	2 HP	77 GPM	230 FT	35 GPM	141 FT	2"	9 FT

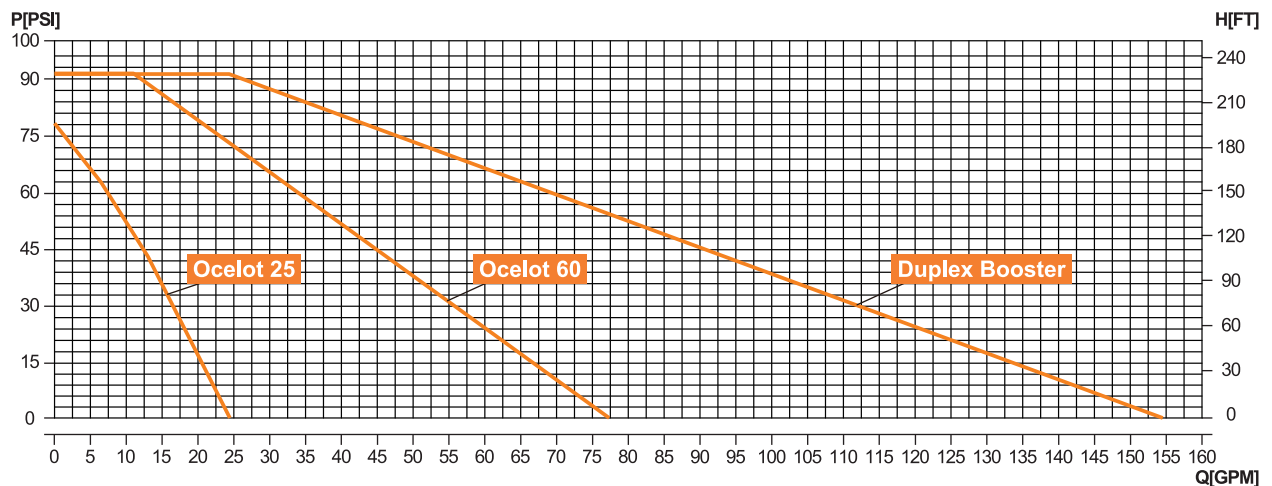

## • ELECTRICAL FEATURES


Model	Voltage	Current	Frequency	Ambient Temperature	Media Temperature
Ocelot 25	120V	8.5A	60Hz	104°F	167°F
Ocelot 60	230V / 1PH 230V / 3PH	7.5A	60Hz	104°F	167°F




# OCELOT BOOSTER

## • SIZE AND WEIGHT

Model	Inlet	Outlet	Size	Weight
Ocelot 25	NPT 1"	NPT 1"	15.2"x8.3"x11.7"	17.6 lbs
Ocelot 60	NPT 2"	NPT 2"	19.7"x8.8"x14.8"	53 lbs

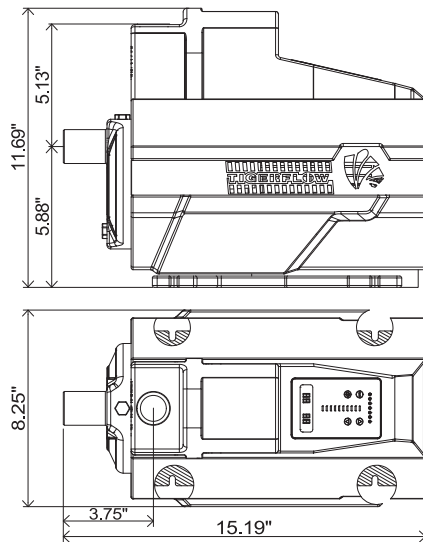

Ocelot 25

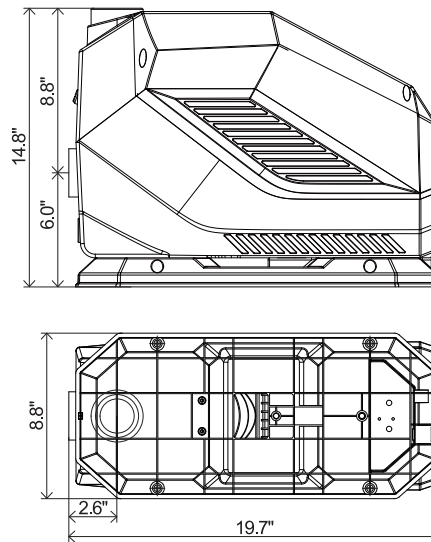

Ocelot 60

## • PRODUCT DISPLAY

**TIGERFLOW**

**Model: Ocelot 25**

VARIABLE SPEED OPERATION PROVIDES UP TO 50% ENERGY SAVINGS

20  
GPM

40  
FT

1  
HP

Voltage: 120V 1Phase      Amps: 8.5A      Max. Boost: 160'  
 Max. Flow: 25GPM      Water Temp: 167°F      Ambient Temp: 104°F  
 Max Suction Lift: 9'      System Connection: 1" NPT      PN: 3300005758

**TIGERFLOW**

**Model: Ocelot 60**

VARIABLE SPEED OPERATION PROVIDES UP TO 50% ENERGY SAVINGS

60  
GPM

60  
FT

2  
HP

Voltage: 230V 1Phase      Amps: 7.5A  
 Max. Boost: 230'      Max. Flow: 70GPM  
 Water Temp: 167°F      Ambient Temp: 104°F  
 Max Suction Lift: 9'      System Connection: 2" NPT



# OCELOT BOOSTER


## STANDARD FEATURES

- Lead-lag automatic operation
- Constant speed control with variable speed
- Automatic alternation
- Excellent for multi-family and other light commercial applications
- 304 Stainless steel piping
- Individual pump isolation valves
- 2.5" Grooved connections

## OPTIONS

- Bladder tank
- Pressure gauges
- Threaded and flanged connections
- Single phase power
- Three phase power

## DUPLEX BOOSTER DIMENSIONS

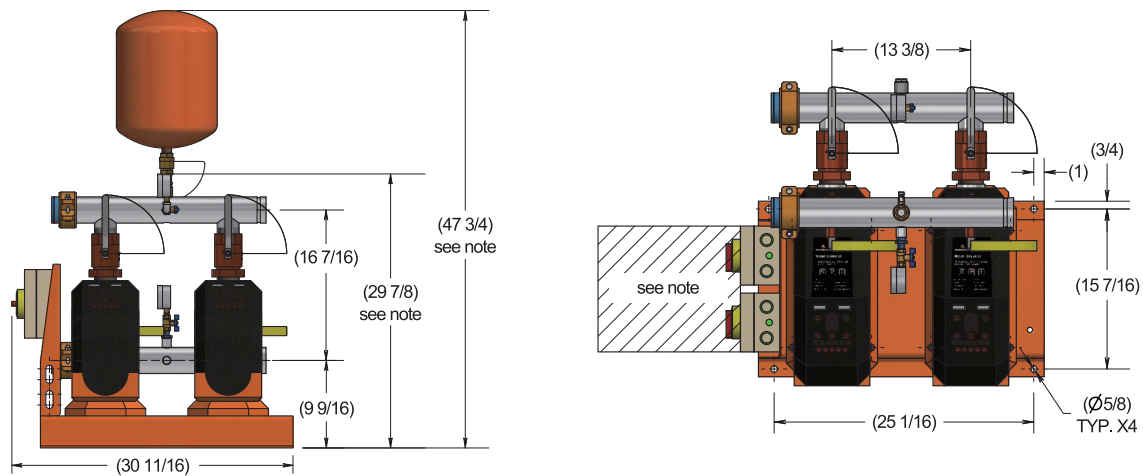

Note: Allow for working space clearance per NEC.

## PERFORMANCE TABLE

Model	Power	Max. Flow	Max. Head	Rated Flow	Rated Head	Port Size	Lift Max
Ocelot Duplex	4HP	144 GPM	230 FT	70 GPM	141 FT	2.5"	9

## ELECTRICAL FEATURES

Model	Power feed	Current	Frequency	Ambient Temperature	Media Temperature
Ocelot Duplex	230V	30A*	60Hz	104°F	167°F

\*If using single-point power feed, otherwise refer to individual pump FLA.