




HVAC

# GLYCOL MAKE-UP UNIT



**TIGERFLOW®**

Glycol make-up unit maintains glycol solution levels in HVAC systems

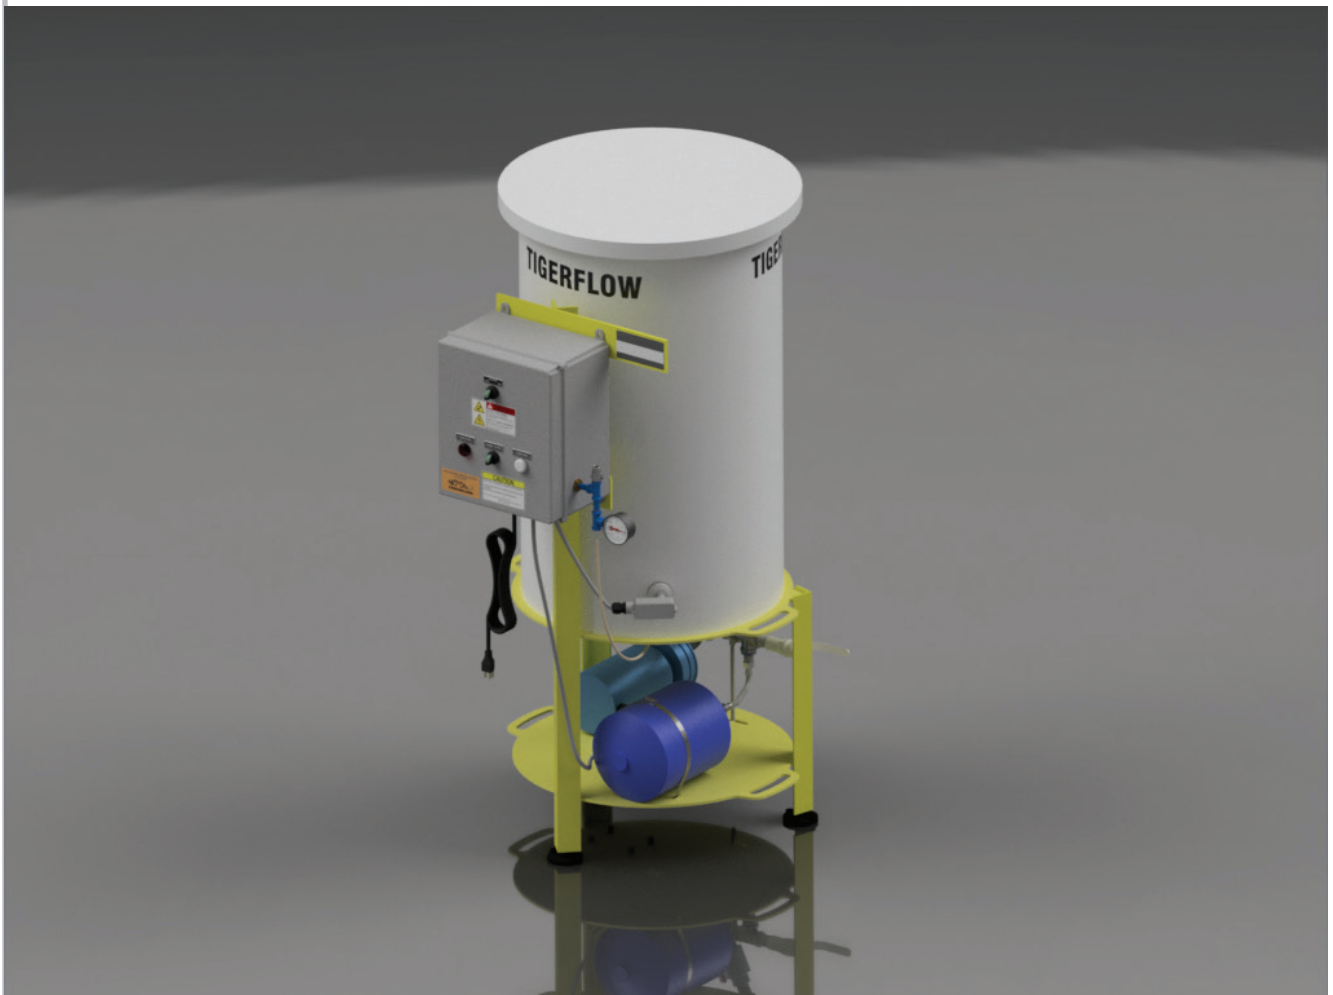

To place an order, please contact 214-337-8780 or [hvac@tigerflow.com](mailto:hvac@tigerflow.com)



HVAC

# GLYCOL MAKE-UP UNIT



**TIGERFLOW**<sup>®</sup>

## BENEFITS

- Certificate of product liability insurance
- Prefabricated and factory tested
- UL/C-UL listed packaged pumping systems (QCZJ)
- UL standard 508A - standard for industrial control panels
- Touchscreen controller interface
- AWS D1.1 certified structural welders
- Engineered to order designs

## STANDARD FEATURES

- Stock standard units with 55 or 100-gallon tanks
- Relief valve adjustable between 50-125 psi
- Steep pump curve allows for pressure settings up to 100 psi
- Adjustable pressure switch with 30-150 psi set point range, 5-30 psi dead band and visible range scale
- Union ball valves allow for easy maintenance, installation and service
- Strainer with stainless steel mesh screen keeps debris from entering system
- 120V/1 phase power with standard three prong plug eliminates the need for an electrical contractor
- Low level switch protects against pump dry run (NC/NO dry contacts provided for remote monitoring)

## OPTIONS

- PLC controls for data centers
- Duplex configuration

- 3 phase input power
- Expansion tank – 2.2-gallon 125 PSI rating

## APPLICATIONS

- Closed Loop Heating Systems
- Chilled Water Systems

## CERTIFICATIONS

